

JORGENSEN SAFES

MANUFACTURERS OF SAFES

Factory 3/14 Nuban Street, Currumbin, Qld. 4223
TELEPHONE: 07 5534 1121 FACSIMILE: 07 5534 6152
P.O. Box 211 Currubin, Qld. 4223

Before operating the lock or changing the combination, READ INSTRUCTIONS THOROUGHLY.

At the upper part of the dial ring, (See Figure 1.) two indexes are provided for the alignment of the numbers. The opening index is used for normal dialing and opening of the lock. The changing index is used only when it is necessary to set the lock to a different combination.

This is a precision lock, therefore, extreme care must be used to align the combination numbers with the index symbols.

Turn the dial slowly and steadily. If, after turning the correct number of revolutions, any number is turned beyond the index, the entire series of combination numbers must be re-dialed. **DO NOT TURN BACK TO REGAIN A PROPER ALIGNMENT WITH THE NUMBERS.** Each time a selected number is aligned with the index a revolution is counted.


TO UNLOCK ON FACTORY SETTING

All locks in this series are set on " 50 - 25 - 50 " after final inspection at our factory. **TO UNLOCK ON THE ABOVE 3 NUMBER COMBINATION.** Complete steps 1. to 4.

1. Turn dial to the LEFT stopping when "50" is aligned with the opening index the FOURTH time.
2. Turn dial to the RIGHT stopping when "25" is aligned with the opening index the THIRD time.
3. Turn dial to the LEFT stopping when "50" is aligned with the opening index the SECOND time.
4. Turn dial slowly to the RIGHT until the Bolt Retracts

TO LOCK.

Turn dial to the LEFT at least four full revolutions.

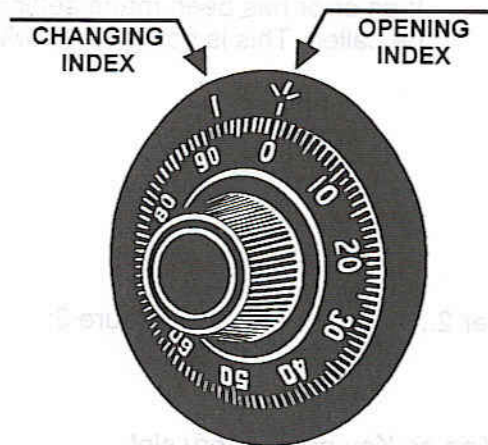

Figurer 1.